Distributed by:

JAMECO® ELECTRONICS

www.Jameco.com ✦ 1-800-831-4242

The content and copyrights of the attached material are the property of its owner.

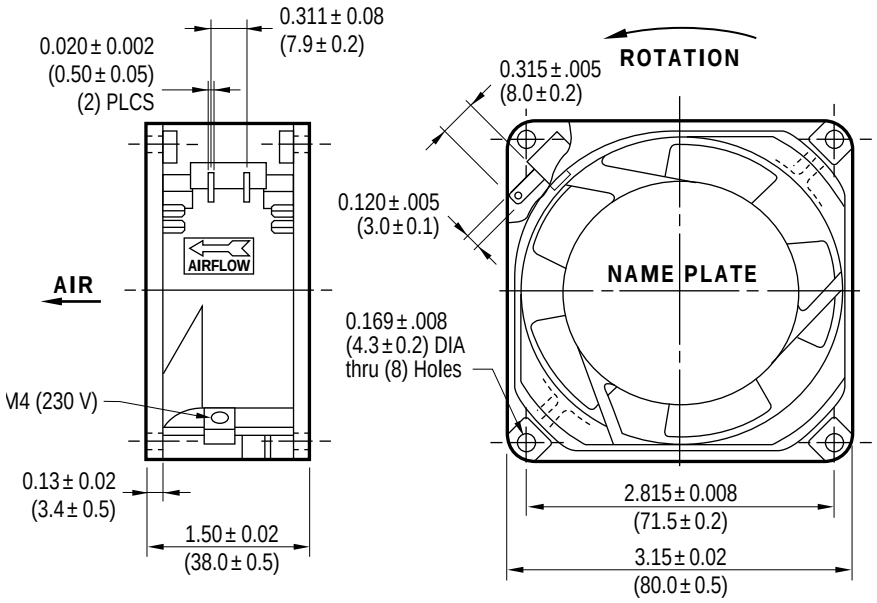

FEATURES:

Size	3.15 in sq. X 1.50 in (80mm x 38mm)
Airflow	18-33 CFM
Weight	12oz (340g)
Noise	31-44 dBA
Impeller	UL94V-O Reinforced Plastic
Venturi	Aluminum Alloy
Terminals	0.120 in
Lead Wire (Optional)	AWG 22, Black, UL3266, CSA CL 1252
Motor	Shaded Pole Induction Motor Air in over struts

† Non-stock item, may be subject to lead time

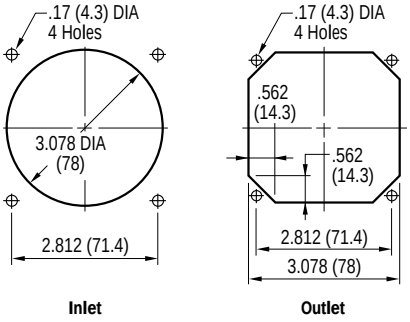

Dimensions are in inches. ( ) are in millimeters

MODEL	VOLTAGE (V)	POWER (W)	CURRENT (mA)	SPEED (RPM)	NOISE (dBA)	PRESSURE (in H_2O)	AIRFLOW (CFM)
3115FS-12T-B00-A00	115	4.0	45	1850	31	0.07	18
B10-A00	115	6.0	87	2100	36	0.09	22
B20-A00 †	115	7.0	90	2700	40	0.13	27
B30-A00	115	8.5	100	3250	44	0.18	32
23T-B10-A00	230	6.5	50	2050	35	0.09	20
B20-A00 †	230	7.5	60	2750	40	0.13	28
B30-A00	230	8.0	65	3250	44	0.18	33